

drylin®.E...

Lubrication-free linear actuator with motor

SENSORS
INCORPORATED

537 Kelley Street • Delano, MN 55328
Phone 763-972-1040, Fax 763-972-1041
Toll Free 888-920-0939
Sensorsincorporated.com



...05.2013... plastics for longer life® ...

igus®.eu

...www.igus.eu/eu/drylinE...

...electric...

drylin® E

“E” as in Electric and is the latest development and addition to the modular drylin linear guide range. The lubricant-free linear guides guarantee clean and dirt-resistant operation. Ready-to-fit linear actuators and drive systems can be fitted with either leadscrew drives or belts. The range of accessories includes handwheels, position indicator, v-drives, couplings and much more. The drylin® E product range is complete with hybrid stepper motors, connectors, encoders, and the proven chainflex® power cables from igus®.

- Delivery time: 3-4 days
- 100% lubricant-free linear guide
- Cost-effective and online configuration possible

Lubrication-free linear guide system using polymer bearings

liners made of maintenance-free iglidur® J

tooth belt, trapezoidal or high helix thread

Ball bearings leadscrew supports

Motor flange: connection for stepper motors

Claw coupling

igus® motors

- Stepper and DC motors
- Cost-effective
- 25 versions
- High protection class or Low-Cost-design




3-4 days



www.igus.eu/eu/drylinE

...applications...

drylin® E – application examples

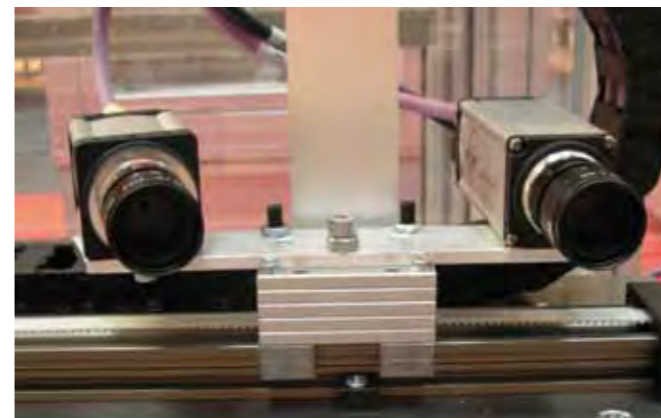

Camera adjustment

A quiet, vibration- and lubrication-free operation is required in this camera adjustment on a conveyor belt using a drylin® ZLW toothed belt axis.




Sampler/pipette

Space-saving telescope adjustment using a compact and lubrication-free drylin® ZLW toothed belt drives. (Sierra Sensors GmbH)



Adjustment of inspection equipment

drylin® ZLW toothed belt drive in an inspection camera adjustment for checking the position of sealing rings. (OLPE Jena GmbH)

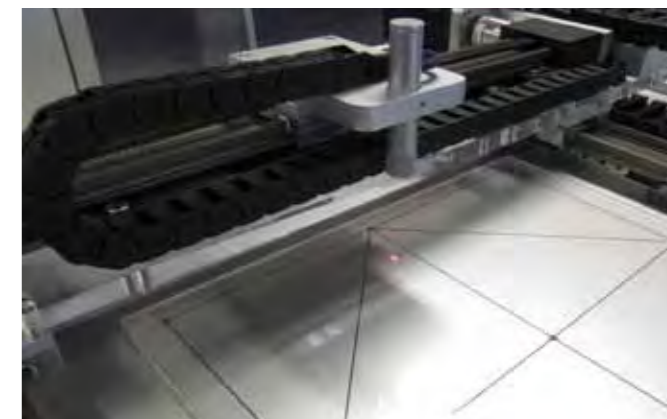

Sensor adjustment/Measuring systems

drylin® ZLW-0630 toothed belt actuators in an X-Y configuration for adjusting a laser detector head. Compact, lightweight and maintenance-free due to polymer plain bearings.



Pick and Place

Quick and maintenance-free handling with drylin® toothed belt axes as a room portal (X, Y, Z axis).



Handling of small parts

The tough and lubrication-free structure of the ZLW and drylin® W profiles allows a long and maintenance-free life.




www.igus.eu/drylinE-applications

...100% lubrication-free...

drylin® linear technology: leadscrew and tooth belt actuators

The drylin® product portfolio provides lubricant-free linear drives that are driven either by a trapezoidal thread, high helix thread or toothed belt. The user can choose a suitable individual solution from lightweight solid plastic units up to heavy duty stainless steel solutions. In all systems, the stroke length is freely selectable and the drive implemented either via handwheel or motor.

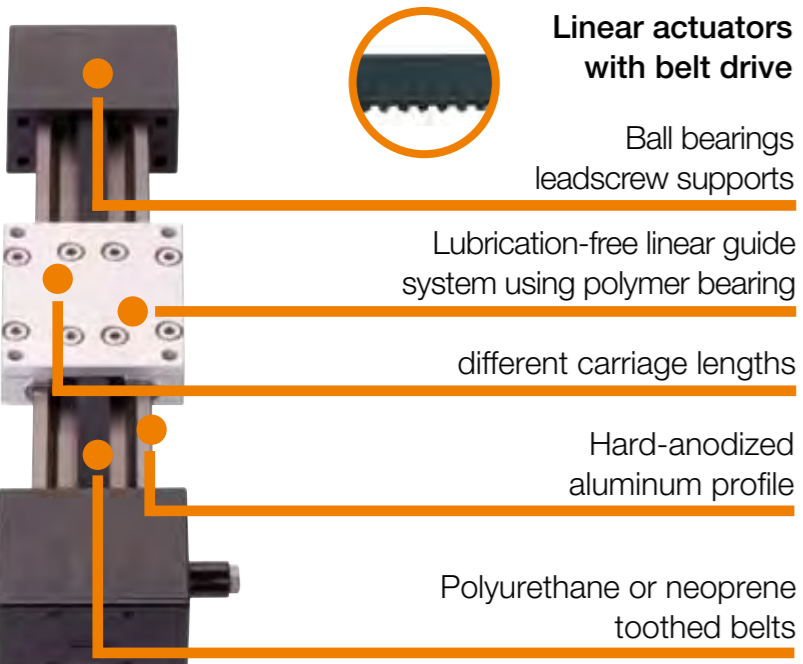

Linear actuators with belt drive


Ball bearings leadscrew supports

Lubrication-free linear guide system using polymer bearing

different carriage lengths

Hard-anodized aluminum profile

Polyurethane or neoprene toothed belts

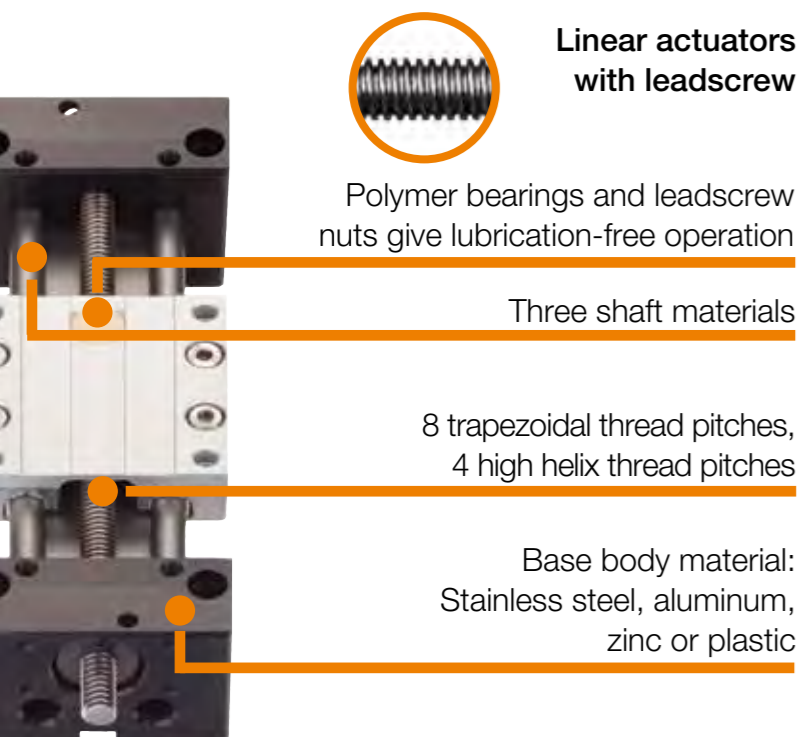

Linear actuators with leadscrew

Polymer bearings and leadscrew nuts give lubrication-free operation

Three shaft materials

8 trapezoidal thread pitches, 4 high helix thread pitches

Base body material: Stainless steel, aluminum, zinc or plastic



When to use it?

- Quick positioning of small loads
- Quiet running
- Flat design
- Long-term usage



When not to use it?

- For high dynamic loads
- When positioning accuracy < 0.1 mm is necessary



When to use it?

- For format adjustments and positioning of medium loads
- In extreme environments
- When a cost-effective, ready-to-fit solution is required
- For low noise applications




When not to use it?

- When high loads combined with very high speeds
- When positioning accuracy < 0.1 mm is necessary
- If high running performance is required in continuous operation

drylin® linear technology

tooth belt drive with motor

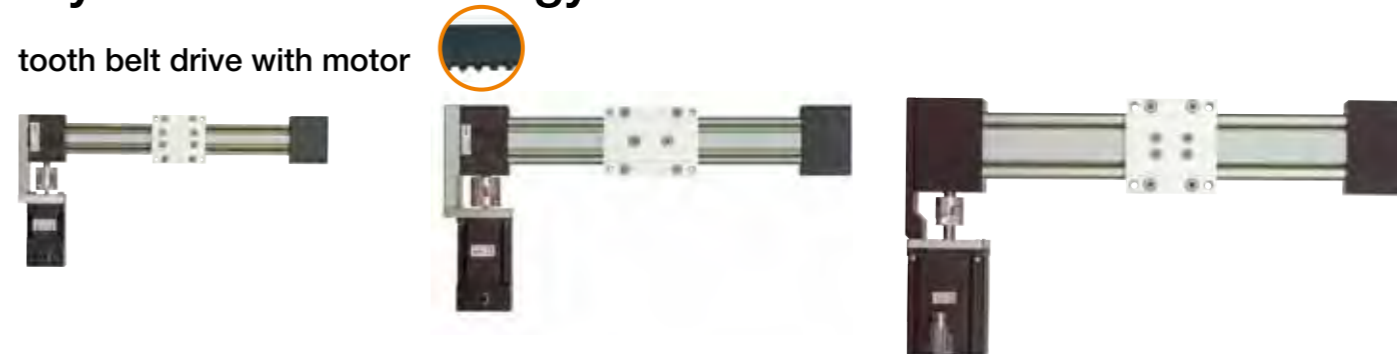

ZLW-0630

- Max. stroke length: 1,000 mm
- Load: max. 15 kg
- Dimensions: 54 x 31 mm

ZLW-1040

- Max. stroke length: 3,000 mm
- Load: max. 30 kg
- Dimensions: 74 x 45 mm


ZLW-1660

- Max. stroke length: 3,000 mm
- Load: max. 100 kg
- Dimensions: 104 x 72 mm



www.igus.eu/eu/drylinE-ZLW

Leadscrew actuators with motor

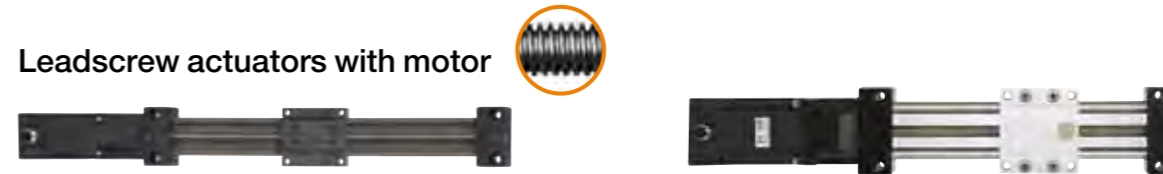

SAW-0630

- Max. stroke length: 300 mm
- Load: max. 40 kg
- Dimensions: 54 x 32 mm
- Leadscrew pitches: 1,5 & 15


SAW-1040

- Max. stroke length: 500 mm
- Load: max. 200 kg
- Dimensions: 74 x 50 mm
- Leadscrew pitches: 2, 3, 12 & 50



www.igus.eu/eu/drylinE-SAW

Other drylin® leadscrew-linear-tables

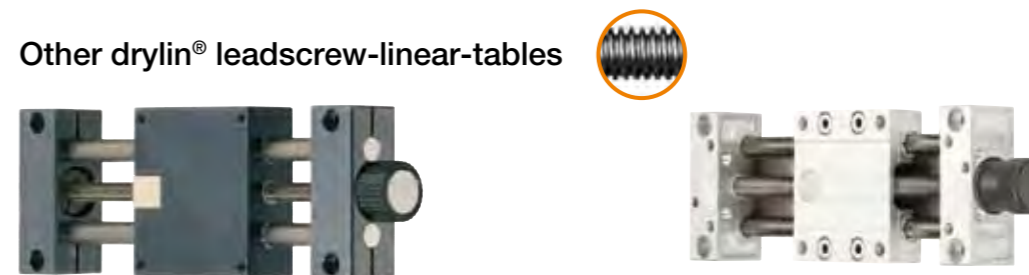

SHT design

- Flat design
- High precision
- Three sizes
- Optional with motor and accessories

SLW design

- Flat design
- High stiffness
- Five sizes
- Optional with motor and accessories



www.igus.eu/eu/drylinSHT



www.igus.eu/eu/drylinSLW

...with motor...

drylin® E NEMA stepper motors: versions



Motor with stranded wires

This motor is the least expensive and the most popular option. The connecting wires for this type come directly from the housing. They are preferably installed in machines and equipment that have an additional housing or are used in clean environments.



Motor with connector plug and encoder

The encoder sends signals from the motor to the control unit. With the encoder the precise linear motion of the drylin® unit can be controlled. Encoder = higher reliability of the equipment.



Motor with connector plug

Fitted with connector plug, it reaches protection class IP65 (IP: International Protection). The higher the IP protection class, the better the protection against dirt and humidity.



Motor with plug, encoder and brake

The brake can hold the load in place when the motor is stopped. This is used as a safety feature in case of power cuts – recommended for vertically installed systems.

drylin® E NEMA stepper motors: sizes

NEMA17:

The small one with lots of power

This little motor can be impressive with good torque and high speeds. Reliable, rapid movements of smaller loads.

- The holding torque M_0 is 0,5 Nm
- The mating face is 42 x 42 mm

NEMA23XL:

The power motor, medium size

An advanced development of the typical NEMA23 with approximately double the torque. The mounting dimensions are the same as in the NEMA23, so that it can be used on the same mounting face.

- The holding torque M_0 is 3,5 Nm
- The mating face is 60 x 60 mm

NEMA23:

The most popular stepper motor size

High torque and high speed are the main advantages. This motor is the best choice for most applications in the medium load range.

- The holding torque M_0 is 2,0 Nm
- The mating face is 56 x 56 mm

NEMA34:

Large size, power package

Applications with high loads should use this large type. Heavy duty or parallel twin rail superstructures are typical working environment.

- The holding torque M_0 is 5,9 Nm
- The mating face is 86 x 86 mm

drylin® E accessories



igus® motors

- Stepper and DC motors
- 25 versions
- High protection class or Low-Cost-design



connector cables

- For motors
- Encoder, brake and connectors
- 24 versions from stock



motor flanges

- To connect with igus® stepper motors or customized motors



couplings

- 50 versions from stock
- Vibration-dampening and flexible



position switches

- High protection class
- Precision fit to the linear guide rail



...design kit...

drylin® E – configure and order individually


“Search”

drylin® product finder for linear slide tables
Just enter useful application-data and compare adequate Linear Slide Tables online and then configure.

► www.igus.eu/sht-productfinder




“Configure”

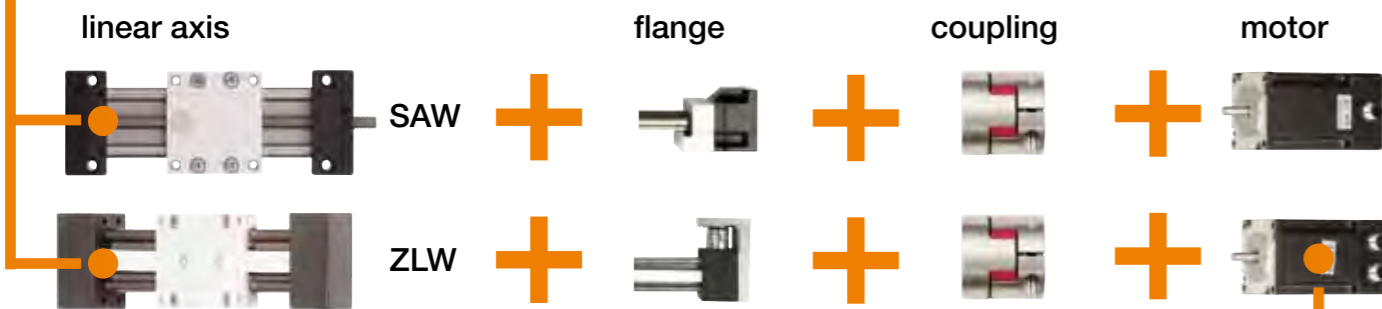

“Ready”


Linear actuators with motor

- Lightweight
- Cost-effective
- 100 % lubrication-free
- More than 50 versions available from stock in 3-4 days

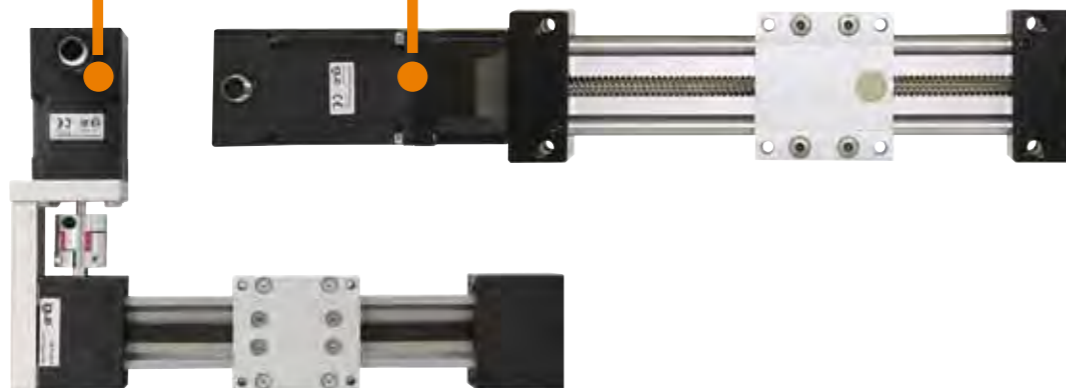

...find online...

calculate, compare and select the right drive units

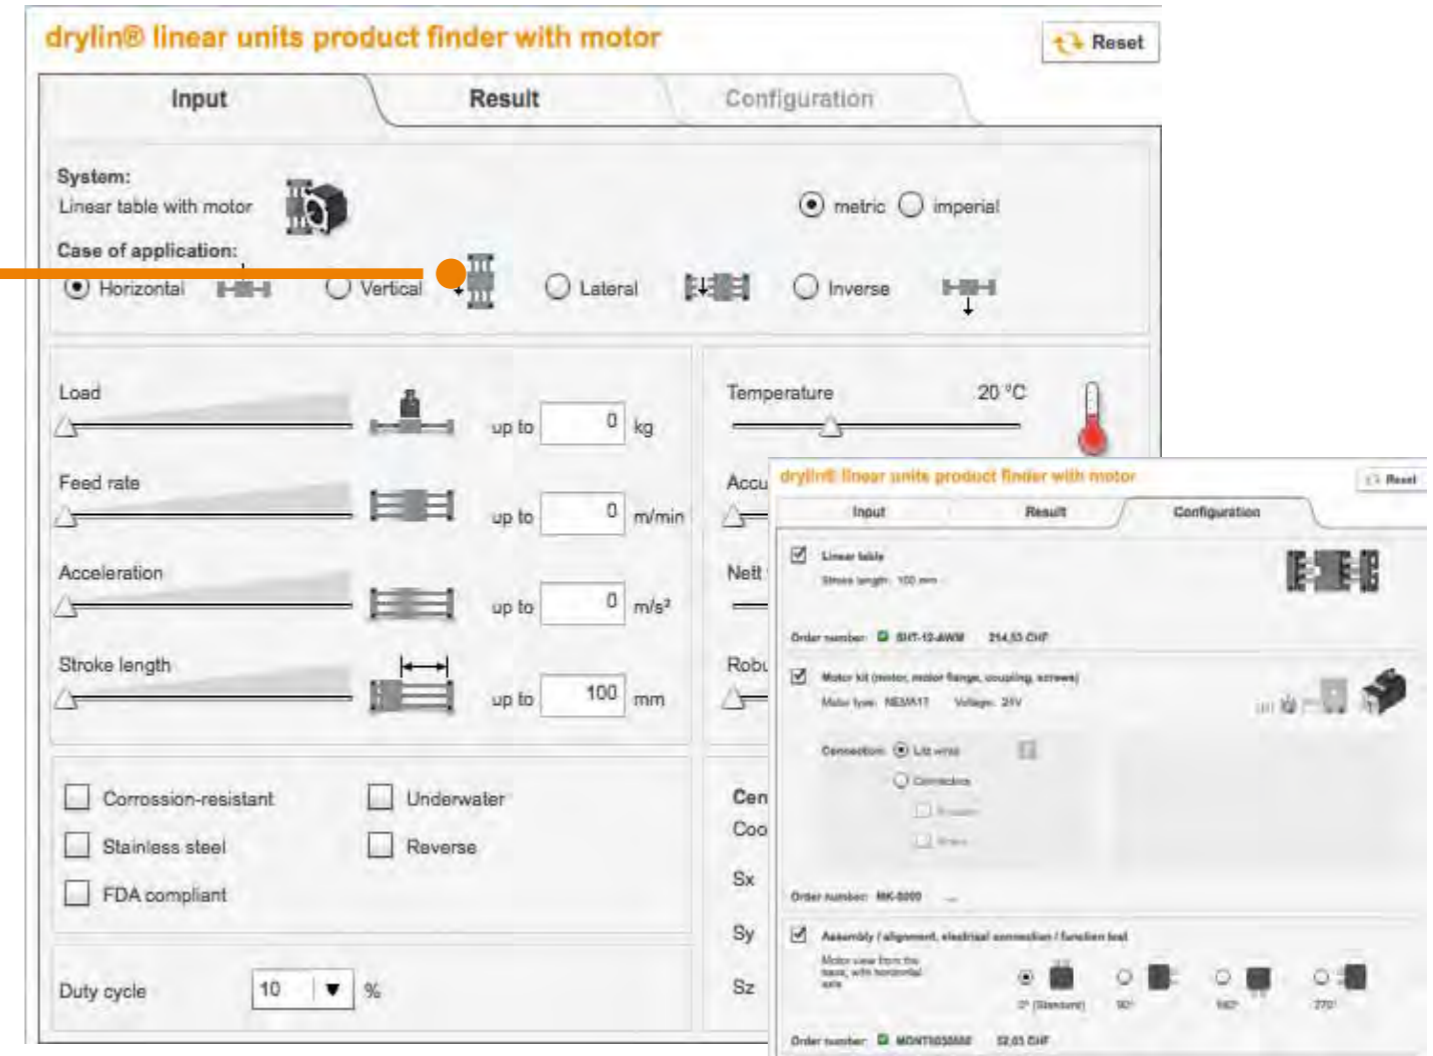

In addition to calculating the correct linear unit, the product finder for drylin® drive technology also provides for the option to calculate the correct motors, incl. service life. The identified solutions can be directly configured and ordered using the same tool.

- Linear solutions tailored to your application, incl. motor if desired
- Configurable accessories and order function
- When selecting motor incl. load calculation
- Easy to understand results screen to select the ideal solution
- Convenient access to other functions, such as online catalog, shopping cart, downloads, etc.



www.igus.eu/eu/drylinE-finder

...Linear axes with motor...SAW...

Linear axes with lead screw drive




+ When to use it?

- For format adjustments and to position medium loads
- In extreme environments
- When a cost-effective, ready-to-install solution is needed
- When it should be low noise
- For unsupported installations

- When not to use it?

- When high loads need to travel at highly dynamic forces
- When positioning accuracy < 0.1 mm is required
- When high running performance is required in continuous operation

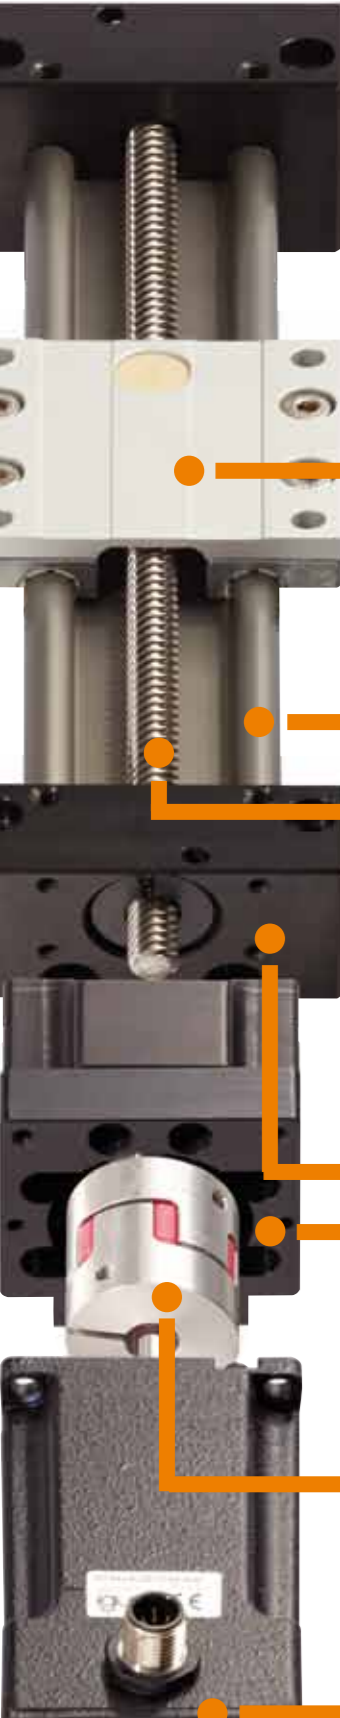

Lubricant and maintenance-free drylin® W linear guide systems

Hard anodized drylin® W aluminum profile (high profile shape)

4 trapezoidal thread pitches
3 high helix thread pitches

Shaft end support from aluminum or plastics

Motor flange: motor connections

Claw coupling

- | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>igus® DC motors</p> <ul style="list-style-type: none"> ● Cost-effective ● Maintenance-free ● 4 versions ● Battery operation possible | <p>igus® stepper motors</p> <ul style="list-style-type: none"> ● Cost-effective ● Maintenance-free ● 5 installation sizes ● 17 versions |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



Order key

SAW-1040-EPL-07-S0020RG-450-17-M-S-000

Type

Installation size

0630
1040
1660

Design

SAW-0630

S: Standard
M: Mono carriage (plastic)

SAW-1040/1660

S: Standard
E: Adjustable linear bearing
PL: Pretensioned (50N)
EPL: Adjustable, pretensioned (50 N)

Carriage length

SAW-0630

06: 60 mm (Standard)

SAW-1040

07: 69 mm (Standard)
10: 100 mm
15: 150 mm

SAW-1660

15: 150 mm (Standard)

Lead screw material:

S: steel
E: stainless steel

Lead screw pitch

SAW-0630

0015: TR8x1,5 mm (steel)
0150: SG8x15 mm (stainless steel)

SAW-1040

0020: TR10x2 mm (steel/stainless steel)
0030: TR10x3 mm (steel/stainless steel)
0120: SG10x12 mm (stainless steel)
0500: SG10x50 mm (stainless steel)

SAW-1660

0040: TR14x4 mm (steel/stainless steel)

Electrical connection alignment

000: 0° (Standard)
090: 90°
180: 180°
270: 270°

Assembly

S: Assembly on the drive pin (standard)

Motor option

L: Litz wires
M: Metric connectors
C: Encoders
D: Encoder and brake
F: Low profile connector (DC-Motor)

Motor size

17: NEMA17: recommended axis 0630
23: NEMA23: recommended axis 1040
23XL: NEMA23XL: recommended axis 1040
DC01: DC-Motor: 0,1 Nm recommended axis 0630
DC03: DC-Motor: 0,3 Nm recommended axis 0630/1040
DC07: DC-Motor: 0,7 Nm recommended axis 0630
DC15: DC-Motor: 1,5 Nm recommended axis 1040/1660

Stroke length

SAW-0630: max. 300 mm
SAW-1040: max. 500 mm
SAW-1660: max. 750 mm

Lead screw end

G: Threaded end

Thread


R: Right | **L:** Left



www.igus.eu/eu/drylinSAW

...Linear axes with motor...SLW...

Linear axes with lead screw drive

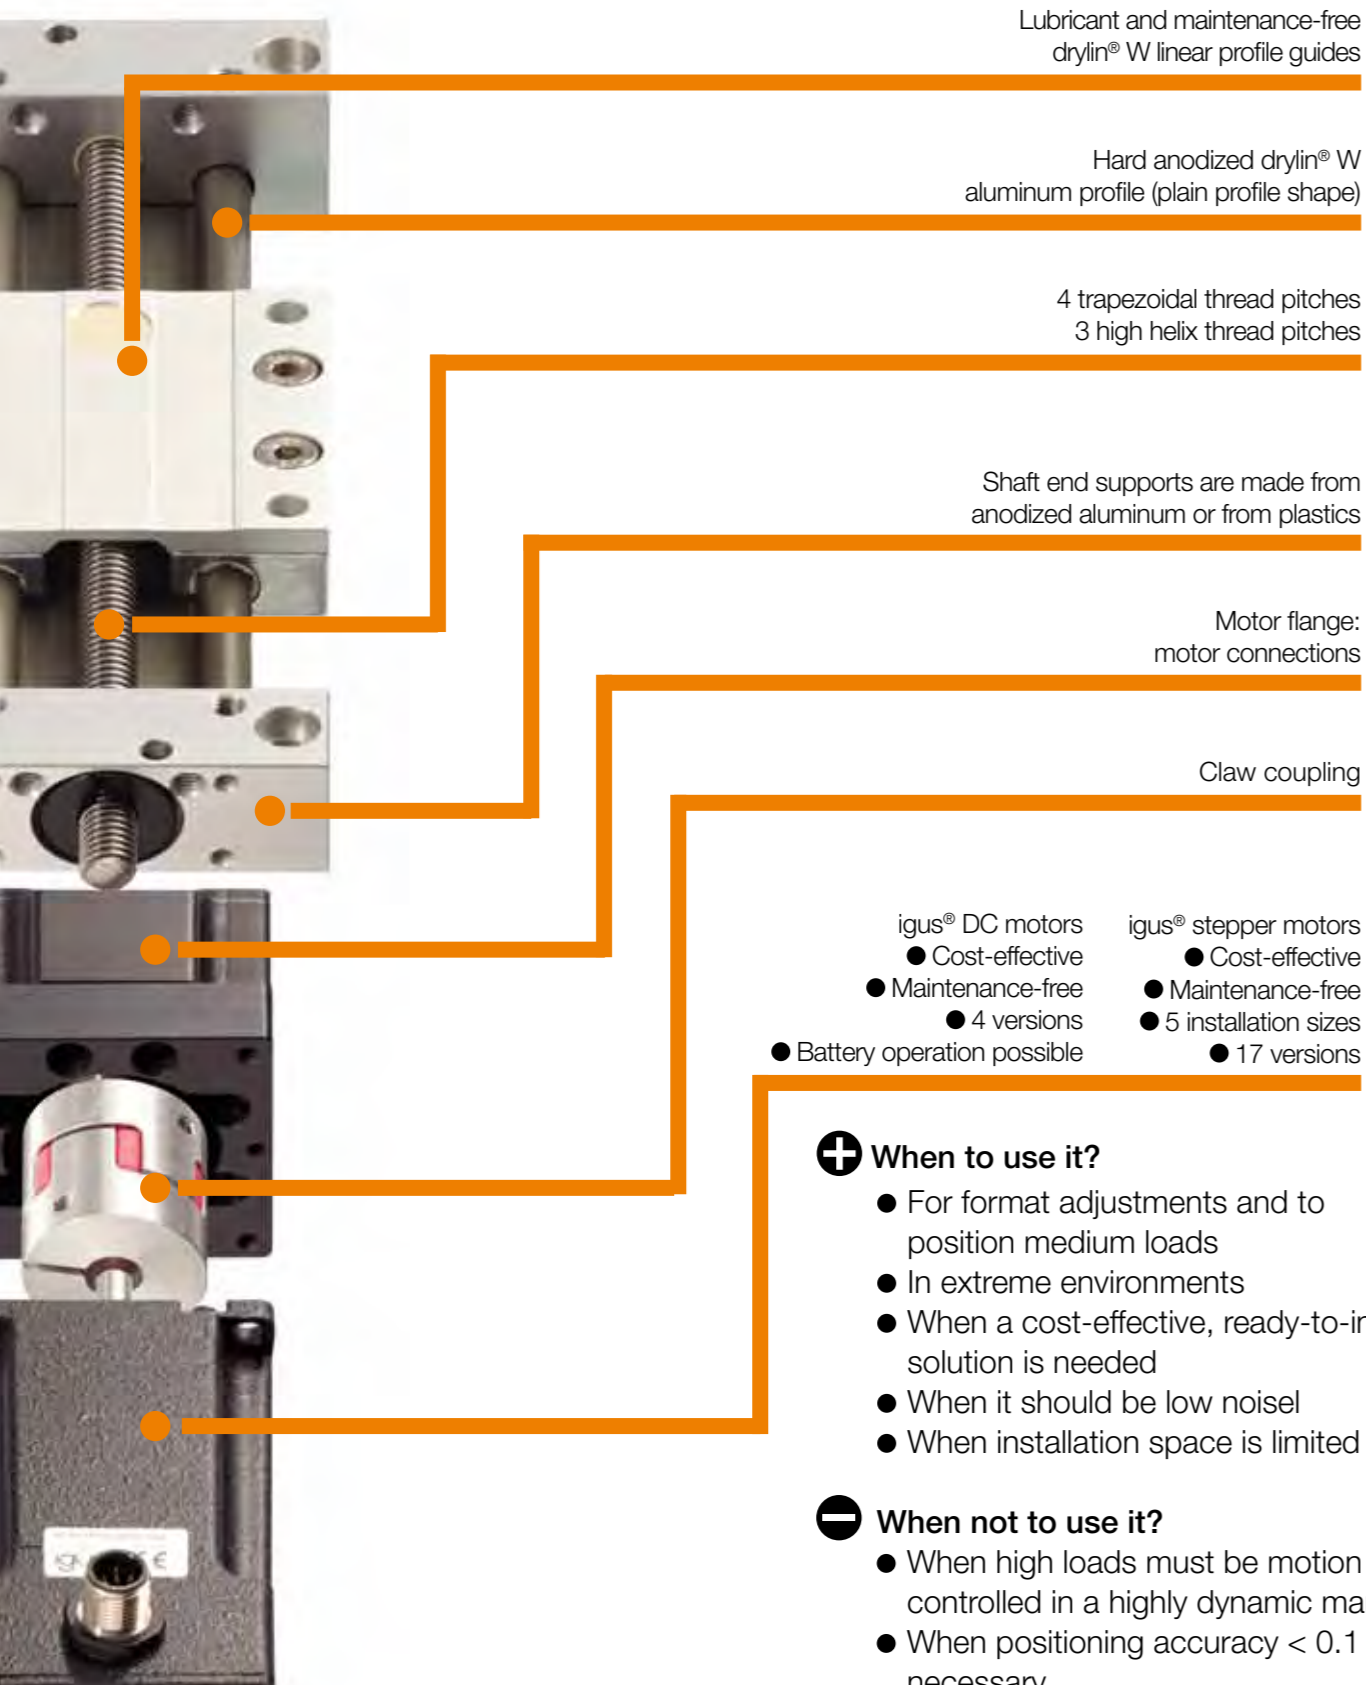

Lubricant and maintenance-free drylin® W linear profile guides

Hard anodized drylin® W aluminum profile (plain profile shape)

4 trapezoidal thread pitches
3 high helix thread pitches

Shaft end supports are made from anodized aluminum or from plastics

Motor flange: motor connections

Claw coupling

- | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>igus® DC motors</p> <ul style="list-style-type: none"> ● Cost-effective ● Maintenance-free ● 4 versions ● Battery operation possible | <p>igus® stepper motors</p> <ul style="list-style-type: none"> ● Cost-effective ● Maintenance-free ● 5 installation sizes ● 17 versions |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

- +** When to use it?
- For format adjustments and to position medium loads
 - In extreme environments
 - When a cost-effective, ready-to-install solution is needed
 - When it should be low noise
 - When installation space is limited
- When not to use it?
- When high loads must be motion controlled in a highly dynamic manner
 - When positioning accuracy < 0.1 mm is necessary
 - When high running performance is required in continuous operation



Order key
SLW-1040-EPL-07-S0020 R G-750-17-L-S-000

<p>Type</p> <p>Installation size 0630 1040/1080 1660 2080</p> <p>Design SLW-0630 BB: Ball bearing SLW-1040/1080/1660/2080 S: Standard E: Adjustable linear bearing PL: Pretensioned (50N) EPL: Adjustable, pretensioned (50 N) BB: Ball bearing BBE: Ball bearing, Adjustable linear bearing BBPL: Ball bearing, pretensioned (50 N) BBEPL: Ball bearing, Adjustable linear bearing, pretensioned (50N)</p> <p>Carriage length SLW-0630 06: 60 mm (Standard) SLW-1040 07: 69 mm (Standard) 10: 100 mm 15: 150 mm SLW-1080/1660/2080 15: 150 mm (Standard)</p> <p>Lead screw material S: steel E: stainless steel</p> <p>Lead screw pitch SLW-0630 0015: TR8x1,5 mm (steel) 0150: SG8x15 mm (stainless steel) SLW-1040/1080 0020: TR10x2 mm (steel/stainless steel) 0030: TR10x3 mm (steel/stainless steel) 0120: SG10x12 mm (stainless steel) 0500: SG10x50 mm (stainless steel) SLW-1660 0040: TR14x4 mm (steel/stainless steel) SLW-2080 0040: TR18x4 mm (steel/stainless steel)</p>	<p>Electrical connection alignment 000: 0° (Standard) 090: 90° 180: 180° 270: 270°</p> <p>Assembly S: Assembly on the drive pin (standard)</p> <p>Motor option L: Litz wires M: Metric connectors C: Encoders D: Encoder and brake F: Low profile connector (DC motor)</p> <p>Motor size/Recommended axis 17: NEMA17 / 0630 23: NEMA23 / 1040, 1080 23XL: NEMA23XL / 1040, 1080, 1660 34: NEMA 34 / 2080 DC01: DC-Motor: 0,1 Nm / 0630 DC03: DC-Motor: 0,3 Nm / 0630, 1040 DC07: DC-Motor: 0,7 Nm / 1040 DC15: DC-Motor: 1,5 Nm / 1040, 1660</p> <p>Stroke length SLW-0630: max. 300 mm SLW-1040/1080: max. 750 mm (BB: max.500 mm) SLW-1660: max 750 mm SLW-2080: max 1000 mm (BB: 900 mm)</p> <p>Lead screw end G: Threaded end Z: End 12h9 (with SLW-2080)</p> <p>Thread R: Right L: Left</p>
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

...Linear axes with motor...SHT...

Linear axes with lead screw drive



3 shaft materials

4 trapezoidal thread pitches
3 high helix thread pitches

Lubricant and maintenance-free with drylin® liners and lead screw nuts

Carriages and shaft end supports from anodized aluminum

Motor flange: motor connections

Claw coupling

- | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> ● igus® DC motors ● Cost-effective ● Maintenance-free ● 4 versions ● Battery operation possible | <ul style="list-style-type: none"> ● igus® stepper motors ● Cost-effective ● Maintenance-free ● 5 installation sizes ● 17 versions |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

- +** **When to use it?**
- For format adjustments and for positioning medium loads
 - In extreme environments
 - When a cost-effective, ready-to-install solution is needed
 - When it should be low noise
 - With low profile installation space
- **When not to use it?**
- When high loads must be motion controlled in a highly dynamic manner
 - When positioning accuracy < 0.1 mm is necessary
 - If high running performance is required in continuous operation



Order key


SHT-12-BBZB-AWM-S0020RG-750-17-L-S-000

<p>Type</p> <p>Installation size 12 20 30</p> <p>Design S: Standard PL: Pretensioned (50 N) BB: Ball bearing BBPL: Ball bearing, pretens. (50 N) BBZB: Ball bearing, Zero-Backlash (only SHT-12 with SG10x12)</p> <p>Shaft material AWM: Hard-anodized aluminum SWM: Cf53 (1.1213) EWM: stainless steel X105 (1.4125)</p> <p>Lead screw material S: steel E: stainless steel</p> <p>Lead screw pitch SHT-12 0020: T10x2 mm (steel/stainless steel) 0030: TR10x3 mm (steel/stainless steel) 0120: SG10x12 mm (stainless steel) 0500: SG10x50 mm (stainless steel) SHT-20 0040: TR18x4 mm (steel/stainless steel) SHT-30 0050: TR24x5 mm (steel/stainless steel)</p> <p>Thread R: Right L: Left</p> <p>Lead screw end G: Threaded end (with SHT-12) Z: End 12h9 (with SHT-20) Z: End 14h9 (with SHT-30)</p>	<p>Electrical connection alignment 000: 0° (Standard) 090: 90° 180: 180° 270: 270°</p> <p>Assembly S: Assembly on the drive pin (standard)</p> <p>Motor option L: Litz wires M: Metric connectors C: Encoders D: Encoder and brake F: Low profile connector (DC motor)</p> <p>Motor size 17: NEMA17: recommended axis 12 23: NEMA23: recommended axis 12/20 23XL: NEMA23XL: recommended axis 20 34: NEMA34: recommended axis 20/30 DC01: DC-Motor: 0,1 Nm recommended axis 12 DC03: DC-Motor: 0,3 Nm recommended axis 12 DC07: DC-Motor: 0,7 Nm recommended axis 12 DC15: DC-Motor: 1,5 Nm recommended axis 12</p> <p>Stroke length SHT-12: max. 750 mm (BB max. 500 mm) SHT-20: max. 1000 mm (BB max. 900 mm) SHT-30: max. 1250 mm (BB max. 1000 mm)</p>
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------



...Linear axes with motor...ZLW...

Linear axes with toothed belt

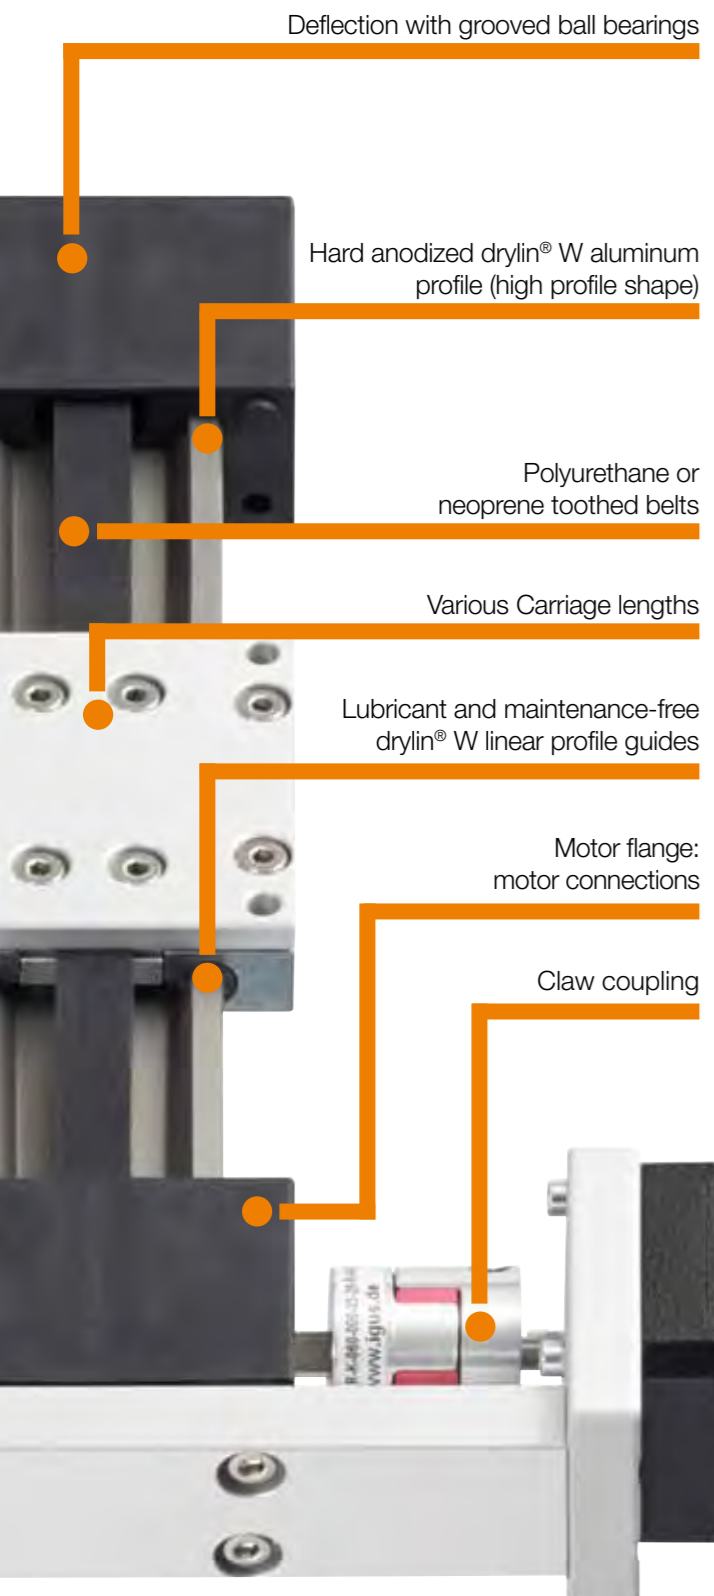

- +** When to use it?
- Quick positioning of small loads
 - Quiet operation
 - Slim structure
 - Continuous operation
- When not to use it?
- When high loads must be motion controlled in a highly dynamic manner
 - When positioning accuracy < 0.1 mm is necessary

- igus® stepper motors
- Cost-effective
 - Maintenance-free
 - 5 installation sizes
 - 17 versions

- igus® DC motors
- Cost-effective
 - Maintenance-free
 - 4 versions
 - Battery operation possible



Order key

ZLW-1040-02-B-60-L-750-17-M-S-000

Type
ZLW

Installation size
0630
1040
1660

Version
02: With grooved ball bearings

Design
S: Type series - standard
B: Type series - basic

Carriage length
60: 60 mm (only ZLW 0630)
100: 100 mm
150: 150 mm
200: 200 mm
250: 250 mm

Drive pins
L: Left-hand drive pin
R: Right-hand drive pin
L/R: Drive both sides

Stroke length
ZLW-0630: max. 1.000 mm
ZLW-1040: max. 2.000 mm
ZLW-1660: max. 3.000 mm

Electrical connection alignment

000: 0° (Standard)
090: 90°
180: 180°
270: 270°

Assembly

S: Assembly with one drive pin (standard)

Motor option

L: Litz wires
M: Metric connectors
C: Encoders
D: Encoder and brake
F: Low profile connector (DC motor)

Motor size

17: NEMA17: recommended axis 0630
23: NEMA23: recommended axis 1040
23XL: NEMA23XL: recommended axis 1040
34: NEMA34: recomm. axis 1040/1660
DC01: DC-Motor 0,1 Nm: recommended axis 0630
DC03: DC-Motor: 0,3 Nm: recommended axis 0630
DC07: DC-Motor: 0,7 Nm: recommended axis 1040
DC15: DC-Motor: 1,5 Nm: recommended axis 1040



Linear axes with motor...SLN&GRW.

Miniature linear axis with lead screw drive



Base body made from corrosion resistant rugged plastic

Lubricant-free linear guide using polymer plain bearings

Lubricant and maintenance-free drylin® N low profile linear guides

1 trapezoidal thread pitch, 1 high helix thread pitch

Motor flange: motor connections

- igus® stepper motors
- Cost-effective
 - Maintenance-free
 - 1 installation size
 - 2 versions

Cantilever axis with rack drive



Aluminum base body

Assembly option for limit reference switch already integrated

- igus® stepper motors
- Cost-effective
 - Maintenance-free
 - 1 installation size
 - 4 Versions

Lubricant and maintenance-free drylin® N low profile linear guide



Order key
SLN-27-02-0050-100-11-L-S-000

Type SLN	Motor pin alignment 000: 0° (Standard) 090: 90° 180: 180° 270: 270°
Installation size 27	Assembly S: Assembly with one drive pin (standard)
Design 02: With motor	Motor option L: Litz wires C: Encoders
Lead screw pitch SLN-27: 0008: M5x0,8 mm (stainless steel) 0050: SG5x5 mm (stainless steel)	Motor size 11: NEMA11
	Stroke length SLN-27: max. 250 mm



Order key:
GRW-0630-A-80-150-17-L-S-000

Type GRW	Motor pin alignment 000: 0° (Standard) 090: 90° 180: 180° 270: 270°
Installation size 0630	Assembly S: Assembly with one drive pin (standard)
Design A: Standard	Motor option L: Litz wires M: Metric connectors C: Encoders D: Encoder and brake
Carriage length 80: 80 mm	Motor size 17: NEMA17
Hublänge GRW-0630: max. 150 mm	

igus®.eu/20h

Ordering and deliveries weekdays from 7.00 am to 8.00 pm, Saturday from 8.00 am to 12.00 pm. No minimum order quantities, no surcharges.

Quick delivery.

www.igus.eu Tel. +49-2203 9649-0 Fax -222

igus®.eu/24

Online shopping – 24 h!

More catalogs and brochures online – www.igus.eu/downloads

ISO 9001:2008

ISO/TS 16949:2009

In the sector of energy chains®* with cables and assembly as well as plastic plain bearings, igus® is certified according to DIN EN ISO 9001 : 2008 and ISO/TS 16949 : 2009*.

igus®.eu/ready

Ask for fully harnessed and preassembled readychains® –

increase your cash-flow and profit immediately – www.readychain.eu

igus®.eu

igus® GmbH Spicher Straße 1a D-51147 Cologne
Phone +49 22 03/96 49-145 Fax +49 22 03/96 49-334
info@igus.de www.igus.eu www.drylin.eu

MAT0071843.20 Stand 05/2013
Subject to technical alterations