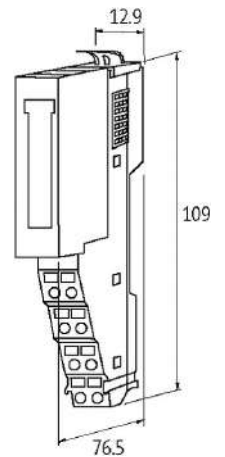



CUBE 20S DIGITAL OUTPUT MODULE DO2

2x230AC 3,0A Relais

Expansion module
DO2 - (E) 230 V AC Relays
Relay outputs

[Link to Product](#)**Illustration**

Product may differ from Image

Approvals**Internal communication**

Module supply	via system connection
Current consumption	max. 130 mA

General data

Protection	IP20
Connection	Spring clamp plug-in terminals: max. 1.5 mm ² (AWG 16)
Mounting method	DIN-rail mountable (EN 60715)

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 06/20

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Temperature range	0...+60 °C (storage temperature -25...+70 °C)
-------------------	---

Dimensions H×W×D	109×12.9×76.5 mm
------------------	------------------

Output

Actuator supply UA	max. 30 V DC/230 V AC
--------------------	-----------------------

Switching current per output	max. 3 A (short-circuit and overload protected)
------------------------------	---

Galvanic isolation	500 V DC between outputs and internal communication
--------------------	---

Diagnostic

Communication status	via LED
----------------------	---------

Diagnostic via LED	per module and channel
--------------------	------------------------

Diagnostic via BUS	per module
--------------------	------------

Monitoring - under voltage	yes
----------------------------	-----

Monitoring - no voltage	no
-------------------------	----

Short-circuit and overload	yes
----------------------------	-----

Commercial data

country of origin	TH
-------------------	----

customs tariff number	85364900
-----------------------	----------

EAN	4048879424448
-----	---------------

eClass	27242604
--------	----------

Packaging unit	1
----------------	---